




ELECTRICAL PROPERTIES



  	
POWER	4W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED


bcm
BENEDETTI LIGHTING

COLORADO A87S
3419/K4W-A87S




MECHANICAL PROPERTIES

 	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	SATIN
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	415 lm		
LIGHTNESS 1mt	192 lx		
LIGHTNESS 2mt	48 lx		
LIGHTNESS 3mt	21 lx		

FINISHES	
WHITE S.STEEL	

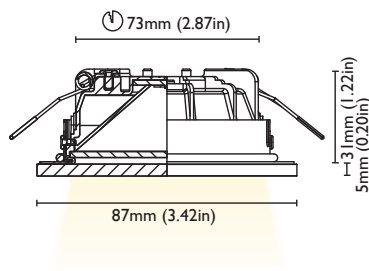

CUT OUT	73mm (2.87in)
FRAME	87 mm (3.42in)
DEPTH	31 mm (1.22in)
REFLECTOR ADJUSTABILITY	NO