




### ELECTRICAL PROPERTIES

  	
POWER	4W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED





**MALIBÙ A85**

**3412/K4W-A85**




### MECHANICAL PROPERTIES

 	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		

#### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

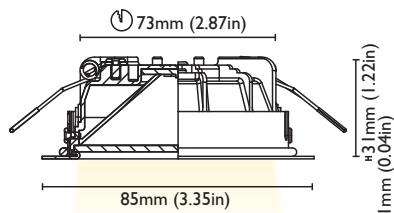

CUT OUT	73mm (2.87in)
FRAME	85 mm (3.35in)
DEPTH	31mm (1.22in)
REFLECTOR ADJUSTABILITY	NO