

MULTI-PURPOSE LED UTILITY LIGHT

OCEANUS


2.520 (white circuit) Lumens in Total



- 18Watts of power provides increased illumination without increasing power consumption.
- LED light output is available in the following configurations and voltages:
 Natural White 3900K in 85V-265V/AC or 10-30V/DC
 Cool White 5500K in 10-30V/DC
 Natural White 3900K plus a small RED circuit for Night Time Illumination in 85V-265V/AC or 10-30V/DC
 Natural White 3900K plus a small White 3900K circuit for Emergency Back-Up in 85V-265V/AC with 10-30V/DC back-up circuit
- CRI – Color Rendering Index of >80CRI provides excellent color rendering and Natural Light appearance.
- Long service life ensures low operating costs and reduces maintenance costs.
- This utility light can be installed in either surface mount or recessed mount configuration.

Specifications:

Art.No.:	MPFL-18W-39+E-WH-H/L to MPFL18W-55-WH-LV
Light Source:	SMD 18Watt
Power Consumption:	18Watt
Efficiency:	>90%
Lumens Per Watt:	140 Lms./Watt
Beam Angle:	160°
LED Colours:	3900K Natural White 3900K Natural White + 3900K Natural White (back-up circuit) 3900K Natural White + Red Circuit 5500K Cool White
Colour Rendering Index:	>80 CRI
Operating Voltage:	10V-30V/DC Low Power Version 85V-265V/AC High Power Version – 50-60Hz 85V-265V/AC High Power Version – 50-60Hz + 10-30V/DC Low Power Version
Material Fixture:	Aluminium & Polycarbonate
IP Rating:	IP55
Finish:	White
Exterior Dimensions:	Surface Mount: 445mm x 175mm (17,5" x 6,9") Recessed Mount: 403mm x 142mm (15,9" x 5,6")
Installed Height Dimensions:	35mm (1,4") 20mm (0,8")
Cut Out for Flush Mount:	370mm x 125mm (14,6" x 4,9")
Certifications:	EMC Directive 204/108/EC EN 55015: 2006+A1: 2007 EN 61000-3-2: 2006/A2: 2009 EN 61000-3-3: 2008 EN 61547: 1995+A1: 2000 In compliance with IEC60092-306

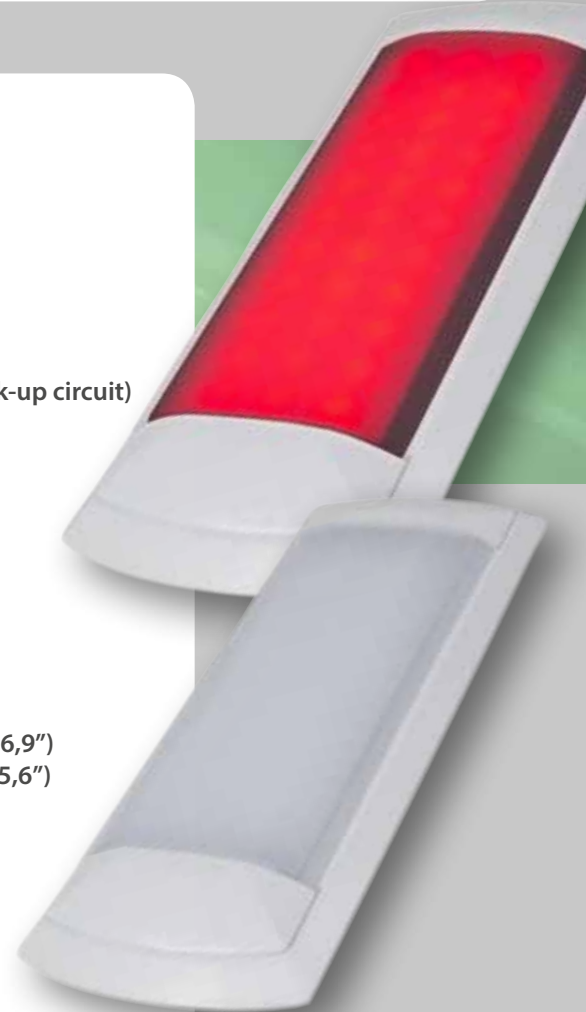

E-LED Lighting BV & Inc.

European Office: Tel: +31 (0)346 28 62 62, Fax +31 (0) 346 28 70 67, E-mail Info@E-LEDLighting.com

United States Office: Tel: +1 (561) 845-7460, Fax: +1 (561) 214-4928, E-mail Info@E-LEDLighting.com