




ELECTRICAL PROPERTIES

  	
POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED



bcm
BENEDETTI LIGHTING


VENICE A70

3411/K2W-A70




MECHANICAL PROPERTIES

 	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	215 lm		
LIGHTNESS 1mt	99 lx		
LIGHTNESS 2mt	25 lx		
LIGHTNESS 3mt	11 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

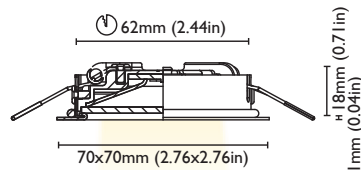

CUT OUT	62mm (2.44in)
FRAME	70x70 mm (2.76x2.76in)
DEPTH	18mm (0.71in)
REFLECTOR ADJUSTABILITY	NO