




ELECTRICAL PROPERTIES

		
POWER	4W	
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
LIGHT SOURCE	OSRAM POWER LED	
LED COLOUR	3000K, 3000K+RED	



bcm
BENEDETTI LIGHTING


VENICE A80

3411/K4W-A80




MECHANICAL PROPERTIES

	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	415 lm		
LIGHTNESS 1mt	191 lx		
LIGHTNESS 2mt	48 lx		
LIGHTNESS 3mt	21 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

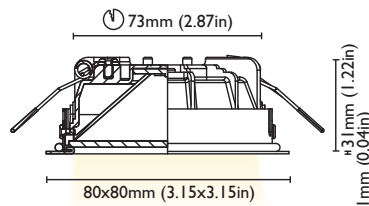

CUT OUT	73mm (2.87in)
FRAME	80x80 mm (3.15x3.15in)
DEPTH	31mm (1.22in)
REFLECTOR ADJUSTABILITY	NO